

Commercial Downlights



RCF Universal Downlight 0-10V / Triac Dimming

4" :	6W/7W/8W 500/590/700 lm	10W/18W/23W 910/1650/2,300 lm
6" :	6W/7W/8W 510/640/730 lm	18W/27W/34W 1,800/2,700/3,400 lm
8" :	5W/8W/11W 450/760/1,100 lm	
10" :	28W/35W/42W 2,800/3,500/4,200 lm	



Architectural Downlight



RCF Universal Downlight Multi-Mode Dimming

6" :	10W/17W/21W 1000/1800/2300 lms	8" :	16W/24W/30W 1800/2700/3400 lms
-------------	--	-------------	--



Fire Rated Slim Baffle Downlight 0-10V / Triac Dimming

4" :	6" :	8" :
11W 900 lms	15W 1250 lms	19W 160 lms



RETROFIT



NEW CONSTRUCTION



REFLECTORS



OPTIONAL FRAMES



LIGHT ENGINE



DOWNLIGHT
4", 6", 8" & 10"



4", 6", 8" & 10"

WALLWASH
6" & 8"



Wattages Below

RAD Series - Downlights

12W/16W/20W 990/1,350/1,640 lm	18W/24W/30W 1,480/1,970/2,460 lm	30W/40W/50W 2,460/3,280/4,100 lm
--	--	--



cMax™

LIGHTING CONTROLS



Using a patented, plug and play design, c-Max makes it easy to add luminaire-level lighting controls to achieve energy savings beyond LED conversion.



- cMax^{BC}** BASIC LIGHTING CONTROLS
 - Streamlined controls for essential needs
 - Affordable in-fixture controls
 - Commission via remote control

- cMax^{RF}** EasyRF™ CONTROLS
 - Groupable wireless controls
 - Easy Commissioning - No app required
 - Efficient, powerful, yet affordable

- cMax^{NC}** NETWORK LIGHTING CONTROLS
 - Bluetooth wireless NLC/LLC solution
 - Commission devices without needing a gateway
 - Extensive range of indoor & outdoor sensors/nodes

- cMax^{NP}** NETWORK PARTNERS
 - Enhanced network solutions with leading technology partners
 - Agnostic to technology and connectivity protocol
 - Enable future IoT needs while meeting today's needs



Controls Ready logo indicates easy in-field Plug and Play sensor installation compatible with Maxlite c-Max control system (DLC NLC qualified)

MaxLite®


COMMERCIAL LIGHTING GUIDE



342 Changebridge Road,
Suite 201, Pine Brook, NJ 07058
T: 1-800-555-5629 | F: 973-244-7333
www.maxlite.com

ITEM # COMMERCIALBRO | ORDER CODE: 112692

Flat Panel

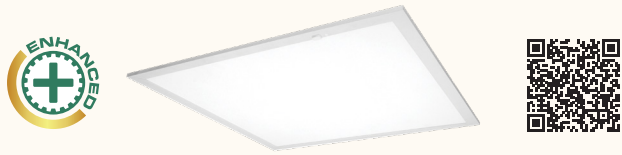

FlatMax™ MLFP G5 Enhanced Flat Panels

1x4:	15W/20W/25W 2,100/2,800/3,500 lm	
2x2:	15W/20W/25W 2,100/2,800/3,500 lm	13W 1,850 lm
2x4:	22W/30W/38W 3,000/4,200/5,300 lm	20W 2,800 lm



Flat Panel Retrofit Kit



FPR Series - Enhanced Panel Retrofit Kit

1x4:	15W/20W/25W 2,100/2,800/3,500 lm	
2x2:	15W/20W/25W 2,100/2,800/3,500 lm	13W 1,850 lm
2x4:	22W/30W/38W 3,000/4,200/5,300 lm	20W 2,850 lm



Troffers



ArcMax™ MLVT G2 Series Enhanced Troffers

1x4:	13W/20W/26W 2,000/3,000/3,900 lm	
2x2:	13W/20W/26W 2,000/3,000/3,900 lm	13W 2,000 lm
2x4:	24W/28W/34W 3,300/4,200/5,100 lm	19W 2,850 lm



Troffers Retrofit Kit



High Lumen Flat Panel

2x2:	30W/40W/50W 3,750/5,000/6,250 lms	
2x4:	40W/50W/60W 5,000/6,250/7,500 lm	



TV Series Value Troffers

2x2:	21W/30W 2600/3750 lms	
2x4:	36W/45W 4500/5600 lms	



TRK G2 Series - Enhanced Troffer Retrofit Kit

1x4:	13W/20W/26W 2,000/3,000/3,900 lm	
2x2:	13W/20W/26W 2,000/3,000/3,900 lm	13W 2,000 lm
2x4:	24W/28W/34W 3,300/4,200/5,100 lm	19W 2,850 lm



DLC Premium Value Flat Panels


1x4:	15W/25W/35W 2115/3425/4655 lms	
2x2:	15W/25W/35W 2115/3425/4655 lms	
2x4:	25W/35W/45W 3425/4690/5895 lms	



MRBK - Value Magnetic Bar Retrofits Kits

	LOW	MEDIUM	HIGH
2':	9W 1,125 lm	10W 1,130 lm	12W 1,575 lm
4':	12W 1,625 lm	14W 1,921 lm	14W 2,275 lm

AVAILABLE AS 1, 2, 3 OR 4 BAR KITS

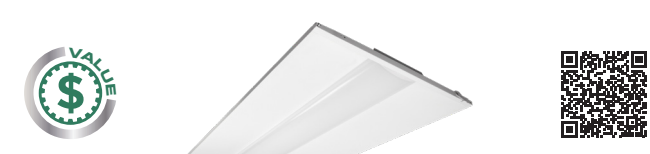

TRKE Series - Value Troffer Retrofit Kit

2x2:	20W/30W 2500/3750 lms	
2x4:	25W/35W 3250/4300 lms	

